

PRODUCT CODE 0060

## TruCare Interior Wall Primer Sealer (WB)

Asian Paints TruCare Interior Wall Primer Sealer(WB) is a water-based wall primer that can be used on interior masonry surfaces.



WATER BASED

**LEAD FREE\* GUARANTEE**

\*All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.


### PRODUCT BENEFITS

Asian Paints TruCare Interior Wall Primer Sealer(WB) a waterbased undercoat and has the following product benefits:

- a) A good adhesion for the entire paint system thereby increasing the life of the system
- b) Good whiteness, coverage and flow and levelling properties
- c) Good sealing properties which ensure a smooth deposition of the paint film
- d) Environment friendly, contains no added lead, cadmium, mercury or arsenic


### PRODUCT FEATURES

#### AVAILABLE PACKS

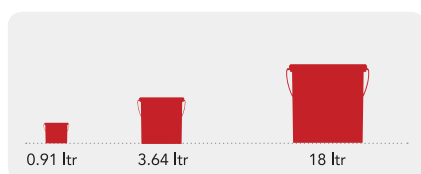

#### COLOURS AVAILABLE

# White



Please note: Asian Paints TruCare Interior Wall Primer Sealer is an undercoat

#### COVERAGE

On smooth masonry surface by brushing/Roller



**1 COAT**


170 - 200 sq.ft/ltr\*\*

\*\*Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

#### DRYING TIME TO RECOAT



#### RECOMMENDED USAGE

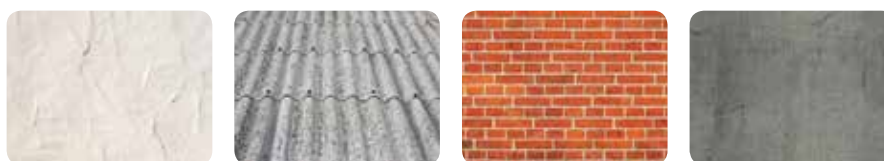

It can be used for priming plastered walls, asbestos, cement, concrete, etc.

### HOW TO APPLY

#### PRE PAINTING STEPS



**PLASTER** New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



**CLEANING** Ensure that surface is completely free from all dirt, loosely held plaster, powdery residue, oil, grease or any other contamination. Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.



**FILLING FOR HOLES & DENTS** In case of dents and holes use Asian Paints TruCare Acrylic Wall Putty or white cement and fine sand in the ratio 1:3

#### APPLICATION PROCESS

APPLICATION	CODE	THINNER	DILUTION %	APPLICATION VISCOSITY <sup>1</sup>	RECOATING PERIOD
STEP 1 SANDING SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN					
STEP 2 TruCare INTERIOR WALL PRIMER SEALER(WB) FIRST COAT BRUSH/ROLLER	0060	WATER	100%	BRUSH/ROLLER 30 - 40	4 - 6 HRS
STEP 3 SANDING SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN					
STEP 4 TruCare ACRYLIC WALL PUTTY PUTTY KNIFE	0064	WATER	BASED ON REQUIREMENT	N/A	6 - 8 HRS
STEP 5 SANDING SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN					
STEP 6 TruCare INTERIOR WALL PRIMER SEALER(WB) SECOND COAT BRUSH/ROLLER	0060	WATER	100%	BRUSH/ROLLER 30 - 40	4 - 6 HRS

1. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.

## ADDITIONAL INFORMATION

### VOC CONTENT



**LOW VOC  
CONTENT**

### PRECAUTIONS

- > Store the product at ambient conditions in well ventilated locations and away from source of ignition and fire.
- > Avoid eye and skin contact. In case of eye and skin contact wash with plenty of clean water.
- > Do not inhale or ingest. In case of inhalation move to fresh air and seek medical attention if symptoms persist in the both the cases.
- > Use protective equipments like rubber or polythene gloves, safety goggles or glasses, face mask while handling the paint.

### TECHNICAL DETAILS

- a. **Drying time:** Surface dry time 30 min
- b. **Sheen levels:** Matt
- c. **Flash point IS101/1987 Part 1, Sec 6:** NA
- d. **Stability of thinned paint:** To be used within 12 hours.

### SAFETY FEATURES

- > Kindly refer to the MSDS for Asian Paints TruCare Interior Wall Primer sealer which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place
- > Keep out of reach of children and away from eatables.
- > Do not pour leftover paint down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth.
- > No added Lead, Mercury or Chromium compounds.



For enquiries, feedback and complaints,  
please call toll-free number **09612003355** or write  
to us at **weassure.apbl@asianpaints.com**

## Asian Paints Bangladesh Ltd.

**Head Office:** The Pearl Trade Centre (PTC), Cha-90/3, Progoti Sarani, North Badda, Dhaka - 1212. Phone: 09612003355

**Factory & Registered Office:** Gazipur Factory - Plot# 317 & 757, Bahadurpur, Gazipur-1703 | Mirsarai Factory - Plot # 36, Zone 6, Mirsarai Economic Zone, Bangabandhu Sheikh Mujib Industrial City, Chittagong - 4324