

PRODUCT CODE 0026

Apex Ultima

Asian Paints Apex Ultima Advanced Anti-algal Weather Proof is a water-based, modified acrylic smooth emulsion with silicon additives that offers an anti-algal and high performance exterior wall finish.

PRODUCT BENEFITS

Warranty

Apex Ultima comes with a comprehensive 7 years waterproofing and performance warranty when applied with Ultima Protek basecoat. (5 years warranty for coastal markets). Please refer to the Apex Ultima Product Warranty booklet.

Colour Stay™ Technology

Apex Ultima uses specially formulated highperformance colour pigments and binder technology, which offer excellent resistance to ultraviolet radiation. This ensures brighter, cleaner shades that will not fade, ensure your home continues to look beautiful over time.

Advanced Anti-algal Formula

Apex Ultima contains an advanced Anti-algal Formula which fights the formation of algae and keeps away ugly black spots from your walls

Excellent Dirt Pick up Resistance

Apex Ultima is designed with a unique Dirt Pick Up Resistance (DPUR) property. It fights dust from settling on the wall surface and thereby retains the initial beauty.

Sheen

Apex Ultima offers excellent sheen, giving your newly painted home a classy finish.




WATER BASED

LEAD FREE* GUARANTEE

* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.

PRODUCT FEATURES


WASHABILITY

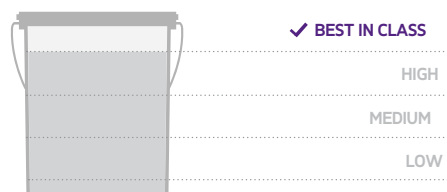

COLOURS AVAILABLE

1700+*

*Currently available in more than 1700 shades as per the Asian Paints Colour Spectra.



COVERAGE

On normal masonry surface by brushing / Roller



1 COAT

150 - 170 sq.ft/ltr**




2 COATS

75 - 85 sq.ft/ltr**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

AVAILABLE PACKS

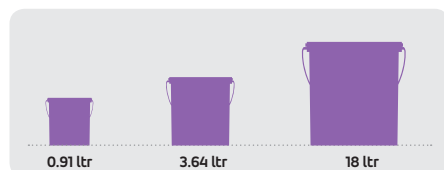

FINISH



HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints Ultima Protek Base Coat.



FILLING FOR CRACKS For filling cracks upto 3mm use Asian Paints Crack Seal.



FILLING FOR HOLES & DENTS We recommend using polymer modified cement sand mortar for better results. Apex Ultima should not be applied on surfaces / substrates seepage or dampness.

PAINT APPLICATION PROCESS

| APPLICATION | PRODUCT CODE | THINNER | DILUTION % (BY VOLUME) | APPLICATION VISCOSITY (SEC) | RECOATING PERIOD (HOURS) |
|---|--------------|---------|---|--------------------------------|--------------------------|
| STEP 1 IN CASE FRESH COATING APEX ULTIMA PROTEK BASE COAT BRUSH / ROLLER* | 0054 | WATER | 30% | N/A | 4 HRS |
| STEP 2 FOR FRESH AND RE-PAINTING APEX ULTIMA PROTEK BASE COAT BRUSH / ROLLER* | 0054 | WATER | NO DILUTION | N/A | 4 - 6 HRS |
| STEP 3 TWO COATS APEX ULTIMA TOP COAT BRUSH / SPRAY / ROLLER* | 0026 | WATER | BRUSH MAX 40 SPRAY MAX 40 ROLLER MAX 40 | BRUSH 60 - 80 SPRAY 60 - 80 | 4 - 6 HRS |

APPLY ULTIMA PROTEK BASE COAT (SELF PRIMING + 1 UNDILUTED COAT) + THREE COATS OF APEX ULTIMA TOP COAT AS PER THE RECOMMENDED APPLICATION PROCEDURE ON HORIZONTAL SURFACES LIKE TOP OF WINDOWS/CHAJJAS ETC

1. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.

2. Some shades may require 3 coats for proper hiding.

*Recommended to be applied with Thread Roller

HOW TO CHOOSE COLOURS

Browse through Asian Paints colour tools to help you find the right colour combination


COLOUR SPECTRA FAN DECK*



ULTIMA BOOK OF COLOUR
(FOR HOMES)



ULTIMA SHADE CARD



*These shades are for reference only. Please refer to the Colour Spectra or Colour Palette for correct shade reference

FORESITE SERVICE

Choosing the right combination of shades for your home can be difficult. At such times, you could do with some professional help. Asian Paints Foresite provides you with prints for your home in 3 colour combinations, as selected by you. Visit an Asian Paints Colour World retail store which offers this service, and furnish a digital photograph (resolution 300-dpi or more) to the dealer.



ADDITIONAL INFORMATION

VOC CONTENT




**LOW VOC
CONTENT**

POST PAINTING CARE

For the best performance of the paint, ensure proper washing of the painting surface and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

- a. Drying time: Surface dry time 30 min
- b. Sheen levels: 15 - 20 at 60 deg GH
- c. Flash point IS101/1987 Part 1, Sec 6: NA
- d. Stability of thinned paint: To be used within 12 hours

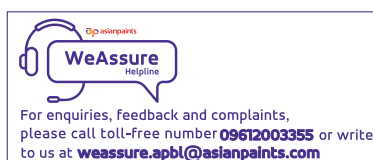

PRECAUTIONS

- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- > Do not over-thin or over-extend the brush.
- > Tint using Asian Paints machine colourants only
- > Stir well and strain before use.
- > Tinted paints need thorough shaking immediately after tinter addition as well as before use.

SAFETY FEATURES

- > Kindly refer to the MSDS for Asian Paints Apex Ultima which gives detailed information on safety measures while handling the paint.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place
- > Keep out of reach of children and away from food, drink
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- > Do not pour leftover paint down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth.
- > Safety Data Sheet available for professional user on request.
- > No added Lead, Mercury or Chromium compounds

Asian Paints Bangladesh Ltd.

Head Office: The Pearl Trade Centre (PTC), Cha-90/3, Progoti Sarani, North Badda, Dhaka - 1212. Phone: 09612003355

Factory & Registered Office: Gazipur Factory: Plot# 317 & 757, Bahadurpur, Gazipur-1703 | Mirsarai Factory: Plot # 36, Zone 6, Mirsarai Economic Zone, Bangabandhu Sheikh Mujib Industrial City, Chittagong - 4324