

PRODUCT CODE F0059

SmartCare Damp Sheath Exterior

Asian Paints SmartCare Damp Sheath Exterior is a waterproofing basecoat for Asian Paints Exterior Emulsion coatings for vertical walls.



WATER BASED

LEAD FREE* GUARANTEE

* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.

PRODUCT BENEFITS

Water proofing

Best in class waterproofing of up to 3 bars of positive waterproofing pressure on vertical surfaces

Adhesion

Superior Adhesion on all masonry and cementitious surfaces

Flexibility

Best in class flexibility with 150% elongation

Crack Bridging

Superior crack bridging ability (CBA) of up to 0.5mm

Warranty

3 Years waterproofing warranty

Application


Single product for vertical application

Use

Easy to apply

PRODUCT FEATURES

AVAILABLE PACKS

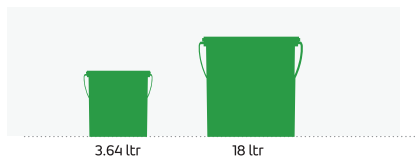

Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.


COLOURS AVAILABLE



COVERAGE



DRYING TIME TO TOUCH




RECOMMENDED USAGE




Can be used on all cementitious and masonry surfaces as waterproofing basecoat for all vertical walls.

HOW TO APPLY


PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Prepare the surface by cleaning it with a high pressure water jet / wire brush and ensure it is free of dust, oil, grease and loose particles. Check the substrate for its soundness & damaged portions. All hollow areas must be repaired with polymer modified cement-sand mortar.



FILLING FOR CRACKS Small cracks of up to 3 mm width or less should be cleaned & filled with Asian Paints SmartCare Crack Seal. Bigger cracks, damaged portions and hollow areas must be repaired with polymer modified cement mortars.



APPLICATION ON VERTICAL SURFACE/WALL Apply one self-priming coat of Damp Sheath Exterior (10 % by volume/100 ml water to 1 ltr of SmartCare Damp Sheath Exterior) on the surface with the help of a brush or roller at 8.28 sqm/ltr(90 sqft/ltr) consumption. Allow it to dry for minimum 4 hrs followed by one undiluted coat of SmartCare Damp Shield Exterior at 8.28 sqm/ltr (90 sqft/ltr) consumption to achieve overall forced coverage of 4.14 sqm/ltr (45 sqft/ltr). Topcoat this treatment with two coats of any Asian Paints Exterior Emulsion as per recommended application procedure.

ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

a. Form: Ready to use viscous liquid

b. Mix Density: 1.26

c. Application temperature: 5°C to 35°C

SAFETY FEATURES

- › Do not apply during rains or when it is expected to rain
- › Kindly refer to the MSDS for Asian Paints SmartCare Damp Sheath Exterior which gives detailed information on safety measures while handling the paint, which is available on request.
- › Store the container with the lid tightly closed in an upright position, in a cool, dry place
- › Keep out of reach of children and away from eatables.
- › May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- › Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- › In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- › Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- › Do not pour leftover paint down the drain or in water courses.
- › In the event of spills, contain spillage using sand or earth.
- › No added Lead, Mercury or Chromium compounds.



For enquiries, feedback and complaints,
please call toll-free number **09612003355** or write
to us at **weassure.apbl@asianpaints.com**