

PRODUCT CODE F0590

SmartCare Damp Sheath Interior

SmartCare Damp Sheath Interior Primer is specially formulated acrylic copolymer based, anti damp, economy undercoat for interior surfaces. It prevents surface dampness from manifesting itself on top coat and enhances the life of topcoat.



WATER BASED

LEAD FREE* GUARANTEE




* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.

PRODUCT BENEFITS

- Easy to apply, water based composition.
- Protects the topcoat from damp patches due to surface dampness.
- Enhances life of topcoat
- Increases topcoat coverage

PRODUCT FEATURES

AVAILABLE PACKS

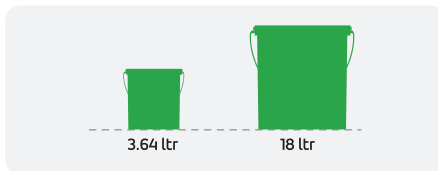

Shelf life: If stored in original sealed container, 24 months from the date of manufacturing

COLOURS AVAILABLE



COVERAGE:



HOW TO APPLY

APPLICATION PROCESS

APPLICATION	PROCEDURE	APPLICATION	PROCEDURE
STEP 1	Clean the surface to ensure it is free of any dirt and loose particles. Sand the surface with sand paper 180 and wipe it clean.	STEP 3	For a smooth finish of topcoat, apply two thin coats of Asian Paints TruCare Acrylic Wall Putty. Allow it to dry for 4-6 hrs. Sand with sand paper 180. Wipe clean.
STEP 2	Apply a single coat of Asian Paints SmartCare Damp Sheath Interior with maximum 30% dilution, with a forced coverage of not more than 130 sq.ft/ltr. Allow it to dry for 3-4 hrs.	STEP 4	Apply another coat of Asian Paints SmartCare Damp Sheath Interior with maximum 30% dilution, with a forced coverage of not more than 130 sq.ft/ltr. Allow it to dry for 3-4 hrs. Apply two coats of any Asian Paints topcoat as per recommended application.

Do's

- Ensure that surface is properly cleaned and free from any loosely held plaster/powder.
- Make sure that moisture content in the surface is not more than 40%.
- Asian Paints SmartCare Damp Sheath Interior is recommended to be applied by brush followed by roller for levelling.
- Do not over spread. Maintain coverage of 130 sq.ft/ ltr each coat for the best result.

Precautions


- Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- Do not apply when humidity is greater than 90%. It may cause prolonged drying time of paint and moisture condensation on the walls.
- Asian Paints SmartCare Damp Sheath Interior is not designed for application over excessive dampness (moisture level above 40%).
- Make sure that paint is thoroughly stirred and strained before application.
- Subsequent coats of topcoat is to be done as per the recommendation for respective topcoats.

TECHNICAL DETAIL:

- Form: Ready to use viscous liquid.
- Drying Time: Surface dry time 60 min.
- Shelf Life: 24 months from date of manufacture in original tightly closed containers. Keep the container away from direct sunlight and excessive heat.
- Application Temperature: Should be above 10 °C.
- Recoating time: 4 to 6 Hrs.

SAFETY FEATURES

- Kindly refer to the MSDS for Asian Paints Damp Sheath Interior which gives detailed information on safety measures while handling the paint, which is available on request.
- Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- Keep out of reach of children and away from eatables.
- May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- Do not pour leftover paint down the drain or in water courses.
- In the event of spills, contain spillage using sand or earth.
- No added Lead, Mercury or Chromium compounds.



For enquiries, feedback and complaints,
please call toll-free number **09612003355** or write
to us at **weassure.apbl@asianpaints.com**