

PRODUCT CODE TOPCOAT

Ultima Protek Shyne

Asian Paints Ultima Protek Shyne is a lamination exterior emulsion paint formulated with PU technology and engineered synergy of pure acrylics latex based on core shell modified silicone. Its unique surface cross-linking feature coupled with mechanical, anti-carbonation properties provide long lasting durability and lamination effect in severest climatic conditions.



WATER BASED

LEAD FREE* GUARANTEE

* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium From April 2008.

PRODUCT BENEFITS

Warranty

Ultima Protek Shyne comes with 10 years waterproofing and performance warranty when applied with Ultima Protek basecoat. (Please refer to the Ultima Protek Shyne warranty booklet for details.)

2X film strength

The film is twice as strong as any regular exterior paint for more durability.

Crack Bridging

The Ultima Protek Shyne film has significantly higher elongation and comes with unique fiber reinforcement thereby offering a unique crack bridging ability of upto - - -

Superior Cleanability

Better ease to clean dust, dirt streaks and bird droppings ensuring your walls look fresh for a longer period of time.

Structure Protection

Ultima Protek shyne System has excellent CO2 diffusion (carbonation) resistance & prevents the corrosion of rebar within the concrete matrix, leading to superior structural protection.

Anti-Fading

Provides superior anti fading properties resulting longer shade durability.

Anti-Algal


Ultima Protek shyne provides excellent resistance to growth of algae and fungi on the walls. This prevents appearance of black spots on walls due to algal growth.

High Sheen


Shiniest exterior paint available in Bangladesh. The unique Sheen Stay Technology ensure the same shine year after year.

PRODUCT FEATURES

WASHABILITY

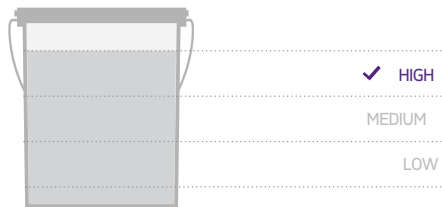


AVAILABLE PACKS

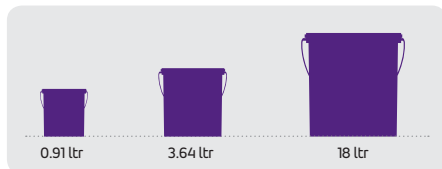


COLOURS AVAILABLE

1600+*



*Currently available in more than 1600 shades as per the Asian Paints Colour Spectra.

FINISH

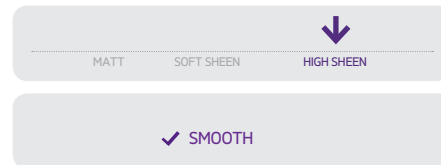

COVERAGE


On normal masonry surface by brushing



**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints Ultima Protek Base Coat.



FILLING FOR CRACKS For filling cracks upto 3mm use Asian Paints Crack Seal.



FILLING FOR HOLES & DENTS We recommend using polymer modified cement sand mortar for better results. Ultima Protek Shyne should not be applied on surfaces / substrates seepage or dampness.

PAINT APPLICATION PROCESS

APPLICATION	PRODUCT CODE	THINNER	DILUTION % (BY VOLUME)	APPLICATION VISCOSITY (SEC)	RECOATING PERIOD (HOURS)
STEP 1 IN CASE FRESH COATING APEX ULTIMA PROTEK BASE COAT BRUSH / ROLLER*	0054	WATER	30%	N/A	4 HRS
APPLY ULTIMA PROTEK BASE COAT (SELF PRIMING + 1 UNDILUTED COAT) + THREE COATS OF ULTIMA PROTEK TOP COAT AS PER THE RECOMMENDED APPLICATION PROCEDURE ON HORIZONTAL SURFACES LIKE TOP OF WINDOWS/CHAJJAS ETC					
STEP 2 FOR FRESH AND RE-PAINTING APEX ULTIMA PROTEK BASE COAT BRUSH / ROLLER*	0054	WATER	NO DILUTION	N/A	4 - 6 HRS
STEP 3 TWO COATS ULTIMA PROTEK SHYNE TOP COAT BRUSH / SPRAY / ROLLER*	0055	WATER	BRUSH MAX 40 SPRAY MAX 40 ROLLER MAX 40	BRUSH 20 - 25 SPRAY 20 - 25	4 - 6 HRS

1. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.
2. Some shades may require 3 coats for proper hiding.
*Recommended to be applied with Thread Roller

HOW TO CHOOSE COLOURS

Browse through Asian Paints colour tools to help you find the right colour combination

COLOUR SPECTRA FAN DECK*



ULTIMA PROTEK SHYNE WEATHER PROOF EXTERIOR EMULSION SHADE CARD



*These shades are for reference only. Please refer to the Colour Spectra or Colour Palette for correct shade reference

FORESITE SERVICE

Choosing the right combination of shades for your home can be difficult. At such times, you could do with some professional help. Asian Paints Foresite provides you with prints for your home in 3 colour combinations, as selected by you. Visit an Asian Paints Colour World retail store which offers this service, and furnish a digital photograph (resolution 300-dpi or more) to the dealer.



ADDITIONAL INFORMATION

VOC CONTENT



**LOW VOC
CONTENT**

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

- a. Drying time: Surface dry time 30 min
- b. Sheen levels: Up to 30-35 at 60 deg GH
- c. Flash point IS101/1987 Part 1, Sec 6: NA
- d. Stability of thinned paint: To be used within 12 hours

PRECAUTIONS

- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- > Do not over-thin or over-extend the brush.
- > Tint using Asian Paints machine colourants only.
- > Stir well and strain before use.
- > Tinted paints need thorough shaking immediately after tinter addition as well as before use.

SAFETY FEATURES

- > Kindly refer to the MSDS for Asian Paints Ultima Protek Shyne Weatherproof Exterior Emulsion which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- > Do not pour leftover paint down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth.
- > No added Lead, Mercury or Chromium compounds.

For enquiries, feedback and complaints, please call toll-free number **09612003355** or write to us at weassure.apbl@asianpaints.com

Version No. VMD103/2019

Asian Paints Bangladesh Ltd.

Head Office: The Pearl Trade Centre (PTC), Cha-90/3, Progoti Sarani, North Badda, Dhaka - 1212. Phone: 09612003355

Factory & Registered Office: Gazipur Factory: Plot# 317 & 757, Bahadurpur, Gazipur-1703 | Mirsarai Factory: Plot # 36, Zone 6, Mirsarai Economic Zone, Chittagong - 4324