

ACE

Exterior Emulsion

ASIAN PAINTS ACE EXTERIOR EMULSION IS A WATER-BASED EXTERIOR WALL FINISH WITH SILICON ADDITIVES SUITABLE FOR DRY TO MODERATELY HUMID CLIMATIC CONDITIONS.



WATER BASED



No Added Mercury, Arsenic & Chromium

Lead contents does not exceed 90 parts per million.

PRODUCT BENEFITS



BETTER PERFORMANCE

ACE offers excellent resistance to chalking, cracking and weathering in comparison to cement paint. Its modified acrylic binder ensures that paint stays on your wall longer than cement paint.

SAVE MONEY IN THE LONG RUN

ACE lasts longer than cement paint and hence proves more economical in the long run. It also does not require curing and therefore saves time, effort and money during application.

CLEAN SHADES


ACE gives neat and clean shades that do not fade and last longer than cement paint shades. It is available in strong/dark shades that provide excellent hiding. It is available in over 1500 attractive shades.

BETTER ANTI-ALGAL PERFORMANCE


ACE provides better anti-algal protection than cement paint especially in dry to moderately humid climatic conditions.

PRODUCT FEATURES

WASHABILITY



COLOURS AVAILABLE



Currently available in more than 1500 shades as per the Asian Paints Colour Spectra.

COVERAGE

On normal masonry surface by brushing



1 COAT


100 - 120 sq.ft/ltr**



2 COATS

50 - 60 sq.ft/ltr**

AVAILABLE PACKS

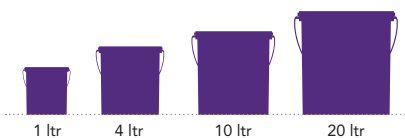

Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

FINISH



MATT SOFT SHEEN RICH SHEEN HIGH GLOSS

✓ SMOOTH

Refer to sheen levels in technical details

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

RECOMMENDED APPLICATION

PRODUCT	CODE	THINNER	DILUTION% (BY VOL)	APPLICATION VISCOSITY (SEC)	RECOATING* PERIOD (HRS)
• Asian Paints Wall Putty (Optional)	0079	Water	Base on requirement to form paste	Paste Form	4 hrs
• Exterior Wall Primer Brush/Roller/Spray	0065	Water	Brush 90-110 Roller 90-110 Spray 40-45	Brush 15-18 Spray 33	4 hrs
HORIZONTAL SURFACES LIKE TOP OF WINDOWS, LEDGES SHOULD BE PAINTED WITH 3 COATS OF ACE FOR GREATER PROTECTION					
APPLICATION OF PRIMER IS MANDATORY					
• First Coat Ace Exterior Emulsion Brush/Roller/Spray	0051	Water	Brush 75 Roller 75 Spray 75	Brush 20-25 Spray 20-25	4-6 hrs
• Second Coat Ace Exterior Emulsion Brush/Roller/Spray	0051	Water	Brush 75 Roller Max 75 Spray 75	Brush 20-25 Spray 20-25	4-6hrs

1. As measured through a Ford cup.

2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.

3. Some shades may require 3 coats for proper hiding.

ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

- a) Drying Time : Surface Dry time - 30 minutes
- b) Sheen Levels : 3-12 at 60° GH
- c) Flash Point (IS 101/1987 Part 1, Sec 6) : NA
- d) Stability of Thinned Paint : To be used within 24 hrs.

PRECAUTIONS

- > Kindly refer to the MSDS for Asian Paints Ace Exterior Emulsion which gives detailed information on safety measures while handling the paint.
- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- > Do not over-thin or over-extend the brush.
- > Tint using Asian Paints machine colourants only.
- > Stir well and strain before use.
- > Tinted paints need thorough shaking immediately after tinter addition as well as before use.

SAFETY AND ENVIRONMENT FEATURES

- > Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion, seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of clean water and seek medical advice.
- > In case of skin contact, immediately wash skin with soap and plenty of clean water. Get medical attention, if irritation develops or persists.
- > Do not breathe vapor or spray. It is recommended to wear mask during sanding and surface preparation to avoid dust inhalation.
- > Do not pour leftover paint down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth and dispose through authorized agency for waste management.
- > No added Mercury, Arsenic, Chromium & Ammonia compounds.
- > Left-Over paint disposal:
 - Left-over paint/drums should not be disposed in soil/drains. Consumer should consult a local recycling agency for disposal of paint/drums.
 - The pails/drums should not be used for storing food items.



For enquiries, feedback and complaints,
please call toll-free number
16600124680/9802033515 or write to us at
weassure@asianpaints.com.np