

PRODUCT CODE 8753

Acrylic Wall Putty


Asian Paints Acrylic Wall Putty is a water based putty. It is one of the best products of its kind available in the market, provides a very strong, durable foundation and brings out the best performance from the finish paints, both in looks and in durability.

PRODUCT BENEFITS

Asian Paints Acrylic Wall Putty is a water based, ready-to-use putty meant for filling and smoothening out cracks and dents on the plastered wall or similar interior surfaces.

- a) The putty has special acrylic binders that ensure that it retains a strong grip on the wall surface, thereby increasing the life of the paint film.
- b) It is made using special equipment and technology that ensure smoothness and consistency

- c) On account of the putty's exceptional whiteness and smoothness, emulsions painted over the putty will tend to look richer
- d) It also enhances breathability and lesser porosity compared to conventional putty, thus improving paint performance further
- e) It is quick drying, thus ensuring faster completion of jobs
- f) It has better alkali resistance, thus making it more suitable for new walls




WATER BASED

asianpaints
No Added Lead, Mercury, Arsenic & Chromium

Lead contents does not exceed 90 parts per million


PRODUCT FEATURES

AVAILABLE PACKS

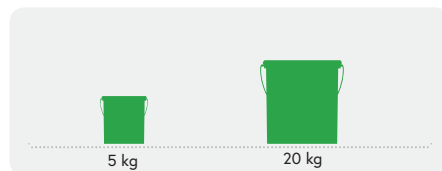

Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

DRYING TIME TO TOUCH



COLOURS AVAILABLE



Please note: Acrylic Wall Putty is an undercoat




COVERAGE

On primed masonry surface by putty knife


2 COAT
 16 - 18
 sq.ft/kg**

*Actual Coverage may vary from the quoted figures due to factors such as method of application, environmental conditions and surface texture.


RECOMMENDED USAGE



Can be used for priming plastered walls, asbestos, brick work, concrete, etc

HOW TO APPLY


PRE PAINTING STEPS




PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints SmartCare Damp Block to limit further dampness.



FILLING FOR CRACKS For filling cracks upto 3mm use Asian Paints SmartCare Crack Seal. Bigger cracks, damaged portions and hollow areas must be repaired with polymer modified cement mortars using SmartCare Latex Xtreme+



FILLING FOR HOLES & DENTS In case of dents and holes use Asian Paints Acrylic Wall Putty or white cement and fine sand in the ratio 1:3

APPLICATION PROCESS

APPLICATION	CODE	THINNER	DILUTION %	APPLICATION VISCOSITY:	RECOATING PERIOD
STEP 1 SANDING	SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN				
STEP 2 ACRYLIC WALL PUTTY FIRST COAT PUTTY KNIFE	8753	 WATER IF REQUIRED	-	PASTE	4 - 6 HRS
STEP 3 ACRYLIC WALL PUTTY SECOND COAT PUTTY KNIFE	8753	 WATER IF REQUIRED	-	PASTE	4 - 6 HRS

1. As measured through a Ford cup.

2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.

ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

- a. **Drying time:** Surface dry time 30 min
- b. **Flash point IS101/1987 Part 1, Sec 6:** NA
- c. **Stability of thinned paint:** To be used within 24 hours

PRECAUTIONS

- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- > Do not over-thin or over-extend the brush.
- > Tint using Asian Paints machine colourants only
- > Stir well and strain before use.
- > Tinted paints need thorough shaking immediately after tinter addition as well as before use.

SAFETY FEATURES

- > Kindly refer to the MSDS for Asian Paints Acrylic Wall Putty which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- > Do not pour leftover material down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth.
- > Left-Over paint disposal:
 - Left-over paint/drums should not be disposed in soil/drains. Consumer should consult a local recycling agency for disposal of paint/drums.
 - The pails/drums should not be used for storing food items.



For enquiries, feedback and complaints, please call toll-free number 16600124680/9802033515 or write to us at weassure@asianpaints.com.np