

Apex Ultima Clear

Asian Paints Apex Ultima Clear is a water-based high performance coating for roof tiles, Chinese bricks and non-porous baked clay tiles.

PRODUCT BENEFITS

Warranty

Ultima Clear comes with a 7-year warranty for film integrity and anti-algal performance.

Anti-Algal

It provides excellent resistance to the growth of algae and fungi on the walls. This prevents the appearance of back spots on walls.

Long Lasting

Asian Paints Apex Ultima Clear incorporates the latest state-of-the-art technology to provide Long-lasting performance in the most tropical and harsh conditions

Highly Durable

Asian Paints Apex Ultima Clear is a highly durable paint that doesn't fade too easily.

Natural Shine

It provides natural shine to the exterior & preserves the shiny look for a long period.

Wet Look

It ensures the just-painted look of the house; i.e. Wet look always remains the same even after many years of painting



WATER BASED


asianpaints

No Added Lead, Mercury, Arsenic & Chromium

Lead contents does not exceed 90 parts per million.


PRODUCT FEATURES

WASHABILITY

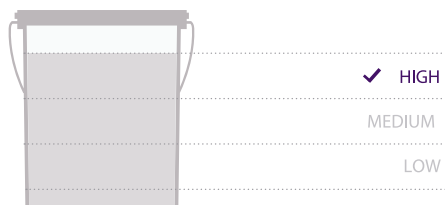

COLOURS AVAILABLE

Clear*



*As per the Asian Paints Colour Spectra.

COVERAGE

On normal masonry surface by brushing



1 COAT

(120-150 sq. ft/ltr)**



2 COATS

(60-70 sq. ft/ltr)**

AVAILABLE PACKS



Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

FINISH




Refer to sheen levels in technical details

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints DampBlock to limit further dampness. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints Exterior Sealer.



FILLING FOR CRACKS For filling cracks upto 3mm use Asian Paints Crack Seal.



FILLING FOR HOLES & DENTS In case of dents and holes use Asian Paints Wall Putty or white cement and fine sand in the ratio 1:3

Apex Ultima Clear should not be applied on surfaces / substrates that are subjected to continuous seepage or dampness.

PAINT APPLICATION PROCESS

APPLICATION	PRODUCT CODE	THINNER	DILUTION % (BY VOLUME)	APPLICATION ¹ VISCOSITY (SEC)	RECOATING PERIOD ² (HOURS)
STEP 1 FIRST COAT ASIAN PAINTS Apex Ultima Clear BRUSH / SPRAY	0012	WATER	20-30%	PASTE FORM	4 - 6 HRS
STEP 2 SECOND COAT ASIAN PAINTS Apex Ultima Clear BRUSH / SPRAY	0012	WATER	20-30%	PASTE FORM	4 - 6 HRS

1. As measured through a Ford cup.

2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.

3. For best results, it is advisable to apply Apex Ultima Clear on both sides of a roof tile individually before laying.



For enquiries, feedback and complaints, please call toll-free number 16600124680/9802033515 or write us at weassure@asianpaints.com.np