

Asian Paints Wall Putty

ASIAN PAINTS WALL PUTTY IS A SPECIALLY DESIGNED PRODUCT BASED ON WHITE CEMENT, REDISPERSIBLE POLYMER AND FUNCTIONAL ADDITIVES FOR APPLICATION ON INTERIOR AND ROUGH PLASTERS TO GIVE A SMOOTH FINISH.



PRODUCT BENEFITS


Asian Paints Wall Putty provides a smooth and uniform finish to rough plasters. The product has the following benefits:-

- Good workability.
- Does not require curing with water.
- Good water resistance.
- Controlled water vapour permeability.
- Excellent Abrasion Resistance.
- Resists the growth of algae and fungi on wall.
- Good intercoat adhesion to Emulsion Paints.




PRODUCT FEATURES

AVAILABLE PACKS

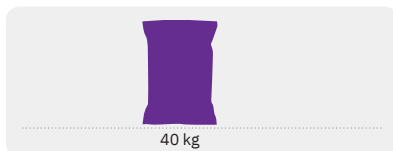

Shelf-life: 1 year from the date of manufacture in tightly sealed plastic bags kept in dry and cool place.

SHADE RANGE



COVERAGE




20 - 25
sq.ft/kg/coat*

* Actual coverage may vary from the quoted figures due to factors such as method of application, environmental conditions and surface texture.

RECOMMENDED USAGE

Asian Paints Wall Putty can be applied on all types of cement plasters, ceilings, asbestos sheets, concrete etc. Asian Paints Wall Putty is recommended for Interior Walls and Ceilings.



RECOMMENDED APPLICATION

CLEANING: Ensure that the surface to be painted is free from any loose paint, dust, oil or grease. Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.

FILLING: Surface imperfections such as holes and dents are to be filled using a mixture of white cement and fine sand in the ratio of 1:3.

Apply top-coats as follows:

PRODUCT	CODE	THINNER	DILUTION% (BY VOL)	RECOATING* PERIOD (HRS)
• AP Wall Putty. 1st Coat By Putty Knife	8079	Water	40-50	4-6 hrs
• AP Wall Putty. 2nd coat By Putty Knife	8079	Water	40-50	4-6 hrs
• AP Primer and Top Coat as recommended.	8360, 8033, 8030, 0031,	Water	As per recommendation	As per recommendation

*Recoating period is for 28-30°C and 60-70% RH, these may vary under different climatic conditions.

ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the topcoat ensure proper washing and cleaning of algal or fungal growth if any at regular intervals.

TECHNICAL DETAILS

- a) Pot Life of thinned material 2.5 - 3.5 Hrs. (Temp. 30 +/- 2 Deg C, %RH 65 +/- 5)
- b) Dry to Recoat 6- 8 Hrs. (Temp. 30 +/- 2 Deg. C, %RH 65 +/- 5)

PRECAUTIONS

- > Kindly refer to the MSDS for Asian Paints Wall Putty which gives detailed information on safety measures while handling the paint.
- > Before application of the material, surface should be clean and free from efflorescence/lime blooming.
- > Do not apply the material without pre-wetting the surface for first and second coat also.
- > Ensure that the material is mixed homogenously with water and allowed to stand for 5 to 10 minutes before application.
- > Do not sand the material vigorously with emery paper otherwise it will reduce strength of the material.
- > Do not apply the material to fill the structural cracks.
- > Though the material is non-toxic, care should be taken to avoid dust inhalation while mixing and handling.

SAFETY AND ENVIRONMENT FEATURES

- > Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- > Keep out of reach of children and away from eatables.
- > The pails/drums should not be used for storing food items.
- > May be harmful if swallowed. In case of ingestion, seek immediate medical attention.
- > In case of skin contact immediately wash skin with soap and plenty of water. Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice if irritation develops or persists.
- > Do not breathe vapor or spray. It is recommended to wear proper personal protective equipment during material handling & suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- > Left-over paint/pails should not be disposed of in soil/drains.
- > Consumers should consult an authorized local recycling agency for the disposal of paint/pails
- > Kindly refer to the Safety Data Sheet (SDS) which gives detailed information on safety measures while handling the paint, which is available on request.



For enquiries, feedback and complaints,
please call toll-free number
16600124680/9802033515 or write to us at
weassure@asianpaints.com.np