

Royale Bling

Asian Paints Royale Bling emits a brilliant sparkle, gives an Ultra sheen, and a world-class finish to the wall with unmatched stain resistance and has anti scuff technology backed by advanced reactive nano science.

DESCRIPTION

Ultra Sheen

Lumino-Tech gives your walls the brightest colours, total opacity, and a smooth finish. It ensures that the splendour of your interiors remains intact.

10 Years Performance Assurance

It preserves the wall film integrity and shade fidelity. Royale Bling maintains the beauty of your walls by ensuring there is no lack of uniformity. The combination guarantees good leveling and intercoat adhesion leading to smooth finish and improved durability.

Anti-Microbial

Royale Bling protects your walls against harmful Micro-organisms like fungus that can cause considerable damage.

Green Assure

Green Assure is our promise that the product conforms with international environmental and safety standards. It is low VOC and does not contain hazardous raw material.

Unmatched Stain Resistance

It ensures your walls stay pristine and protected against life's everyday spills and mishaps. The advanced formulation creates a strong barrier that prevents stains from settling into the surface from daily household activities. This makes cleaning effortless-most stains can be wiped away with ease, without affecting the paint's finish.

Anti Scuff Technology

Designed to keep your walls looking as good as new, this feature offers exceptional resistance against everyday marks and abrasions. Whether it's furniture brushing against the surface, or any wooden, plastic or rubber material rubbed over the surface, the coating acts as a protective shield that prevents visible damage.

Crack Bridging Ability

It ensures your walls stay smooth and intact by effectively covering hairline cracks that develop over time. It forms a flexible layer that expands and contracts with the surface, preventing cracks from reappearing. This keeps your walls looking flawless and well-maintained for longer.

Pearl Rich Smoothness

Pearl Rich Smoothness elevates your interiors with a luxurious, smooth finish that mirrors the gentleness of natural pearls. The paint glides effortlessly onto the surface, creating an even, ultra-smooth texture that feels refined to the touch and looks visually stunning.



WATER BASED
asianpaints

No Added Lead, Mercury, Arsenic & Chromium

Lead contents does not exceed 90 parts per million.

PRODUCT FEATURES

WASHABILITY




✓ BEST IN CLASS*

HIGH

MEDIUM

LOW

AVAILABLE PACKS

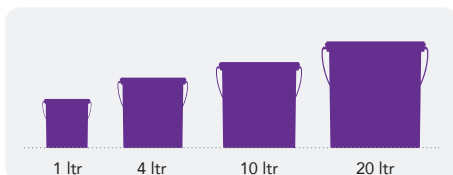


Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

COLOURS AVAILABLE

1480 SHADES*

*Currently available in more than 1480 shades as per the Asian Paints Colour Spectra.



FINISH

MATT RICH MATT SOFT SHEEN HIGH SHEEN **ULTRA SHEEN**

✓ SMOOTH

Refer to gloss levels in technical details

COVERAGE

On normal masonry surface after roller.




2 COATS
120+sqft/ltr**


**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 3 months as the curing time for new masonry surfaces.



PLASTER For filling cracks upto 5mm use Asian Paints Crack Seal.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness, correct it to limit further dampness. Bio block can be used for removing fungus, algae or moss. 2 coats of Smart Care Salt Clean can be used to remove efflorescence, followed by wet sponge mopping.



FILLING FOR HOLES & DENTS

For larger dents/holes it is recommended to use cement and fine sand in the ratio 1:3 mixed with latex xtreme+, 7% by weight of cement.

HOW TO CHOOSE COLOURS

Browse through Asian Paints colour tools to help you find the right color combination.



**These shades are for reference only. Please refer to the Colour Spectra or Colour Palette for correct shade reference.*

PAINT APPLICATION PROCESS

APPLICATION	CODE	THINNER	DILUTION	RECOATING PERIOD
SANDING				
SAND THE SURFACE WITH EMERY PAPER 180 AND WIPE CLEAN				
USE DECOPRIME CEMENT PRIMER WHITE - WT	8360	WATER	50%-60%	4-6 HRS
OR				
ASIAN PAINTS ROYALE BASE COAT	8033	WATER	10%	4-6 HRS
ASIAN PAINTS ACRYLIC WALL PUTTY/ ASIAN WALL PUTTY/ SMARTCARE WATERPROOF WALL PUTTY	8753/8079/8077	WATER	AS REQD	6-8 HRS
SANDING				
SAND WITH EMERY PAPER 180 AND WIPE CLEAN				
ASIAN PAINTS ACRYLIC WALL PUTTY/ ASIAN WALL PUTTY/ SMARTCARE WATERPROOF WALL PUTTY	8753/8079/8077	WATER	AS REQD	6-8 HRS
SANDING				
SAND WITH EMERY PAPER 320 AND WIPE CLEAN				
USE DECOPRIME CEMENT PRIMER WHITE - WT	8360	WATER	50%-60%	4-6 HRS
OR				
ASIAN PAINTS ROYALE BASE COAT	8033	WATER	10%	4-6 HRS
SANDING				
SAND WITH EMERY PAPER 320 AND WIPE CLEAN				
APPLY 1 st COAT OF ROYALE BLING	8031	WATER	15%-20%	4-6 HRS
SANDING				
SAND WITH EMERY PAPER 400 AND WIPE CLEAN				
APPLY 2 nd COAT OF ROYALE BLING	8031	WATER	15%-20%	4-6 HRS

In case of surfaces which have dampness issues or chances of moisture ingress in future, it is highly recommended to use Smart Care Damp Block 2K (2-3 coats) before starting normal paint application.

ADDITIONAL INFORMATION

PRECAUTIONS

- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- > Do not apply when humidity exceeds 85% or when raining outside.
- > Do not over-thin or over-extend the brush.
- > Tint using Asian Paints machine colorants only.
- > Stir well and strain before use.
- > Tinted paints need thorough shaking immediately after tinter addition as well as before use.

POST PAINTING CARE

The Golden rule for removing any wall stains is that one should remove it immediately.

Remove all dirt using a clean cloth or duster. Always remove dirt from top to bottom, this helps in avoiding loose dirt to smudge the walls.

For regular household stains 5% mild soap/detergent solution to remove the stains.

TECHNICAL DETAILS

- Drying Time:**
Surface dry (touch dry) - 30 to 45 minutes.
- Gloss Levels:**
55 at 60 deg GH
- Flash Point (IS101/1987 Part 1, Sec6):**
NA
- Stability of Thinned Paint:**
Use within 24 hrs.

SAFETY FEATURES

- > Kindly refer to the MSDS for Asian Paints Royale Bling which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- > Do not pour leftover paint down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth.
- > No added Lead, Mercury, Arsenic or Chromium compounds.
- > Customers should consult a local recycling agency for proper disposal of paints/drum
- > Ensure that the surface is dry. Surface Moisture (On moisture meter) is under 16%. In case it is higher, find out the source of water and address it before painting. Allow undercoats to dry sufficiently before applying paint.
- > Ensure the paint is cured for 2 week under normal atmospheric conditions. (300C; 50-60% RH) prior cleaning stains.
- > Application of Acrylic Wall Putty and adherence to the painting system will be to best results.
- > Avoid use of Alkyd Based Primer with Cement Based Putty or filling compounds.



For enquiries, feedback and complaints, please call toll-free number 16600124680/9802033515 or write us at weassure@asianpaints.com.np