

PRODUCT CODE 8089

Ultima Basecoat

Asian Paints Ultima Basecoat is a specialized High Performance Luxury Primer for exterior walls featuring Rain Guard Technology, it serves as a protective barrier against water seepage. Its high elongation emulsion prevents the formation of paint cracks and enhances topcoat coverage by 15-20%.

PRODUCT BENEFITS

Crack Free Finish (upto 1mm)

Ultima Basecoat with its high elongation emulsion, protects the wall against cracks upto 1mm.

5X higher water resistance

Provides 5 times higher protection against water compared to normal primer.

Use

Single coat Application as an undercoat for exterior walls

Rain Guard Technology

Made with advanced technology emulsion which protects the house against fierce rains

Increase in topcoat coverage

The complete sealing of pores of the wall allows the topcoat to glide smoothly leading to a 15% increase in topcoat coverage.

Warranty

7+2 Years Ultima Performance warranty on Ultima Topcoat



WATER BASED




No Added Lead, Mercury, Arsenic & Chromium

Lead content does not exceed 90 parts per million.

PRODUCT FEATURES


AVAILABLE PACKS

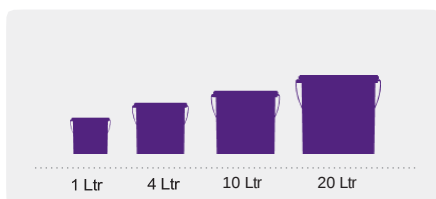

Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

COLOURS AVAILABLE

White



DRYING TIME TO TOUCH



RECOMMENDED USAGE



Recommended to be used as an undercoat on all vertical Exterior Walls.
(Specially recommended for Ultima.)

COVERAGE




1 Coat


45sq.ft/Ltr on vertical walls

HOW TO APPLY


PRE-PAINTING STEPS




PLASTER New masonry surfaces must be allowed to be cured completely. It is recommended to allow plaster curing time as 28 days for new masonry surfaces.



CLEANING Prepare the surface by cleaning it with a high-pressure water jet/wire brush and ensure it is free of dust, oil, grease and loose particles. Check the substrate for its soundness & damaged portions. All hollow areas must be repaired with cement mixed with Latex Xtreme+.



FILLING FOR CRACKS Small cracks of up to 3mm width or less should be cleaned and filled with Asian Paints SmartCare Crack Seal. For cracks more than 3mm width should be repaired with cement mortar mixed with Latex Xtreme+.



APPLICATION ON VERTICAL SURFACE/ PARAPET WALL

Apply one coat of Asian Paints Ultima Basecoat with 20% dilution by volume on the surface with the help of a brush or roller with a forced coverage of 45-50 sq. ft/ltr. Use both horizontal and vertical roller movements to prevent any gaps. Allow it to dry for minimum 4 hours. Topcoat this with 2 coats of Asian Paints Apex Ultima as per the recommended application procedure.

* Applying 1 coat of Ultima Basecoat and 2 coats of Apex Ultima topcoat offers an extended warranty of 2 years on the pre-existing 7 years Ultima warranty

ADDITIONAL INFORMATION

PRECAUTIONS

- > Do not apply during rain or when it is expected to rain and ensure that the roof has an adequate slope to avoid water logging

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

- a. **Form:** Ready to use viscous liquid
- b. **Mix Density:** 1.345 g/cc
- c. **Application Temperature:** Ambient temperature should not be less than 10°C during & within 2-3 hrs application
- d. **Recoating time:** 4 to 6 Hrs.

SAFETY FEATURES

- > Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- > Keep out of reach of children and away from eatables.
- > The pails/drums should not be used for storing food items.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > In case of skin contact immediately wash skin with soap and plenty of water. Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice if irritation develops or persists.
- > Do not breathe vapor or spray. It is recommended to wear proper personal protective equipment during material handling & suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- > Left-over paint/pails should not be disposed of in soil/drains.
- > Consumers should consult an authorized local recycling agency for the disposal of paint/pails.
- > Kindly refer to the Safety Data Sheet (SDS) which gives detailed information on safety measures while handling the paint, which is available on request.



For enquiries, feedback and complaints, please call toll-free number 16600124680/9802033515 or write to us at weassure@asianpaints.com.np