

PRODUCT CODE 8492

Ultima Createx Crosstex

Asian Paints Ultima Createx Crosstex is a modified acrylic, silica based product that can be used to give a wide range of innovative trowel based patterns for interior and exterior wall surfaces.

PRODUCT BENEFITS

Hides Fine Cracks

It hides surface undulations and fine cracks.

Tough Textured

The tough texture finish lasts for long and ensures low maintenance.

Warranty

Ultima Createx Crosstex comes with 5 years adhesion warranty on texture. (Please refer to Ultima Createx Crosstex warranty booklet for details).

Plaster Protection

It increases the life of plaster by protecting it from wind driven rain.

Anti-algal Formula

It resists fungal and algal growth when applied as system, with the recommended top coat.



asianpaints



Lead content does not exceed 90 parts per million.

PRODUCT FEATURES

FINISH



HORIZONTAL



VERTICAL



CRISS CROSS




RAINFALL

Tough Texture: Lasts long and ensures low maintenance


COLOURS AVAILABLE

1700+*

*Ultima Protek Shyne and Apex Ultima



AVAILABLE PACKS

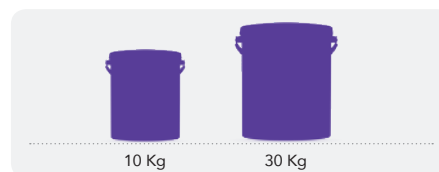

Shelf life: 2 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

COVERAGE

On normal masonry surface by a trowel or spatula to obtain an even coating of ~ 2 mm




1 COAT
3.0 sq.ft/kg**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints SmartCare DampBlock to limit further dampness.



FILLING FOR CRACKS For filling cracks upto 3mm use Asian Paints SmartCare Crack Seal.



FILLING FOR HOLES & DENTS In case of dents and holes use Asian Paints Wall Putty or white cement and fine sand in the ratio 1:3

Ultima Createx Crosstex should not be applied on surfaces / substrates that are subjected to continuous seepage or dampness.

PAINT APPLICATION PROCESS

APPLICATION	PRODUCT CODE	THINNER	DILUTION % (BY VOLUME)	APPLICATION ¹ VISCOSITY (SEC)	RECOATING PERIOD ² (HOURS)
STEP 1 ASIAN PAINTS WALL PUTTY (OPTIONAL)	8079	WATER	BASED ON REQUIREMENT TO FORM PASTE	PASTE FORM	4 HRS
STEP 2 EXTERIOR WALL PRIMER / BRUSH / SPRAY / ROLLER	8065	WATER	BRUSH 90 - 110 SPRAY 40 - 45 ROLLER 90 - 110	BRUSH 15 - 18 SPRAY 33	4 HRS
STEP 3 FIRST COAT ASIAN PAINTS ULTIMA CREATEX CROSSTEX TROWEL	8492	N/A	NOT RECOMMENDED	N/A	12 - 16 HRS
STEP 4 2-3 COATS ASIAN PAINTS ULTIMA PROTEK SHYNE/ APEX ULTIMA BRUSH / SPRAY / ROLLER	8091 8068	WATER	BRUSH MAX 40 SPRAY MAX 40 ROLLER MAX 40	BRUSH 25 - 35 SPRAY 25 - 35	4 - 6 HRS

1. As measured through a Ford cup.
2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.
3. Some shades may require 3 coats for proper hiding.

HOW TO CHOOSE COLOURS

Browse through Asian Paints colour tools to help you find the right colour combination

COLOUR SPECTRA FAN DECK*



*These shades are for reference only. Please refer to the Colour Spectra or Colour Palette for correct shade reference

ADDITIONAL INFORMATION

PRECAUTIONS

- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- > Use of Universal Stainers or colourants is not recommended.
- > Do not keep material open for a long time.
- > Product cannot be applied on surfaces/substrates that are subjected to continuous seepage or dampness.
- > Stir well before use.

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

- a. Drying time:** Surface dry time 30 - 60 min
- b. Flash point IS101/1987 Part 1, Sec 6:** NA

SAFETY FEATURES

- > Kindly refer to the MSDS for Ultima Createx Crosstex which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- > Do not pour leftover paint down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth.
- > No added Lead, Mercury or Chromium compounds.



For enquiries, feedback and complaints, please call toll-free number 16600124680/9802033515 or write us at weassure@asianpaints.com.np