

Ultima Gold

Asian Paints Ultima Gold Emulsion is a metallic finish for exterior walls, that delivers a rich luster and luxurious finish to any exterior wall.

PRODUCT BENEFITS

7 Years Warranty:

Ultima Gold comes with a 7-year warranty for wall surface.

Radiant Glow:

Give your walls a luxurious metallic sheen that elevates your home's elegance and makes it stand out.

Durability:

Built to withstand harsh conditions, Ultima Gold offers exceptional strength for a shiny finish that lasts.

Weather & UV Resistant:

Protects against extreme weather and harmful UV rays, keeping your walls vibrant and damage-free.



WATER BASED


asianpaints

No Added Lead, Mercury, Arsenic & Chromium


Lead contents does not exceed 90 parts per million.

PRODUCT FEATURES

WASHABILITY

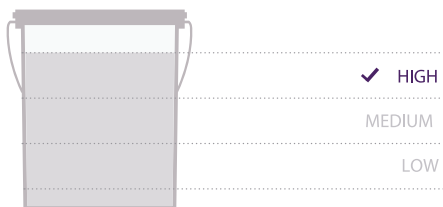


AVAILABLE PACKS



Shelf life 2 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.


COLOURS AVAILABLE

Gold*



*As per the Asian Paints Colour Spectra.

FINISH

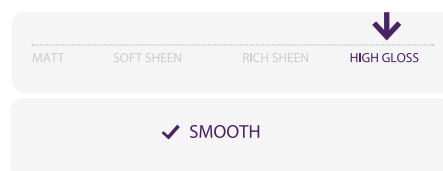

Refer to sheen levels in technical details

COVERAGE

On normal masonry surface by brushing

1 COAT
(40 sq. ft/ltr)**

2 COATS
(20 sq. ft/ltr)**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surface.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints DampBlock to limit further dampness. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints Exterior Sealer.



FILLING FOR CRACKS For filling cracks upto 3mm use Asian Paints Crack Seal.



FILLING FOR HOLES & DENTS In case of dents and holes use Asian Paints Wall Putty or white cement and fine sand in the ratio 1:3. Ultima Gold should not be applied on surface / substrates that are subjected to continuous seepage or dampness

PAINT APPLICATION PROCESS

APPLICATION	PRODUCT CODE	THINNER	DILUTION % (BY VOLUME)	APPLICATION ¹ VISCOSITY (SEC)	RECOATING PERIOD ² (HOURS)
STEP 1 FIRST COAT ASIAN PAINTS Ultima Gold BRUSH / ROLLER	8071	WATER	10-20%	PASTE FORM	3-4 HRS
STEP 2 SECOND COAT ASIAN PAINTS Ultima Gold BRUSH / ROLLER	8071	WATER	10-20%	PASTE FORM	4 HRS

1. As measured through a Ford cup.

2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.

3. For best results, it is advisable to apply Ultima Gold clearon both side of a roof tile individually before laying.

ADDITIONAL INFORMATION

POSTER PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

- | | |
|---|-------------------------------|
| a. Drying time | : Surface dry time 30 min |
| b. Sheen levels | : 15-18 to 25-28 at 85 deg GH |
| c. Flash point IS101/1987 Part 1, Sec 6 | : NA |
| d. Stability of thinned paint | : To be used within 24 hours |

PRECAUTIONS

- > Kindly refer to the MSDS for Asian Paints Ultima Gold Exterior which gives detailed information on safety measures while handling the paints
- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- > Do not over-thin or over-extend the brush.
- > Tint using Asian Paints machine colourants only.
- > Stir well and strain before use.
Tinted paints need thorough shaking immediately after tinter addition as well as before use.

SAFETY AND ENVIRONMENT FEATURES

- > Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion, seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of clean water and seek medical advice.
- > In case of skin contact, immediately wash skin with soap and plenty of clean water. Get medical attention, if irritation develops or persists.
- > Do not breathe vapor or spray. It is recommended to wear mask during sanding and surface preparation to avoid dust inhalation.
- > Do not pour leftover paint down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth and dispose through authorized agency for waste management.
- > No added Mercury, Arsenic, Chromium & Ammonia compounds.
- > No added Mercury, Arsenic, Chromium & Ammonia compounds.

Left-over paint/drums should not be disposed in soil/drains. Consumer should consult a local recycling agency for disposal of paint/drums.

The pails/drums should not be used for storing food items.



For enquiries, feedback and complaints, please call toll-free number 16600124680/9802033515 or write to us at weassure@asianpaints.com.np