

PRODUCT CODE 8091

Ultima Protek Shyne

Asian Paints Ultima Protek Shyne is a lamination exterior emulsion paint formulated with PU technology and engineered synergy of pure acrylics latex based on core shell modified silicone. Its unique surface cross-linking feature coupled with mechanical, anti-carbonation properties provide long lasting durability and lamination effect in severest climatic conditions.



WATER BASED

asianpaints

No Added Mercury, Arsenic & Chromium

Lead contents does not exceed 90 parts per million.

PRODUCT BENEFITS

Warranty

Ultima Protek Shyne comes with 12-year performance warranty (Please refer to the Ultima Protek Shyne warranty booklet for details).

2X film strength

The film is twice as strong as any regular exterior paint for more durability.

Crack Bridging

The Ultima Protek Shyne film has significantly higher elongation and comes with unique fiber reinforcement thereby offering a unique crack bridging ability of upto 1.5mm.

Superior Cleanability

Better ease to clean dust, dirt streaks and bird droppings ensuring your walls look fresh for a longer period of time.

Structure Protection

Ultima Protek shyne System has excellent CO₂ diffusion (carbonation) resistance & prevents the corrosion of rebar within the concrete matrix, leading to superior structural protection.

Anti-Fading


Provides superior anti fading properties resulting longer shade durability.

Anti-Algal

Ultima Protek shyne provides excellent resistance to growth of algae and fungi on the walls. This prevents appearance of black spots on walls due to algal growth.


PRODUCT FEATURES

WASHABILITY

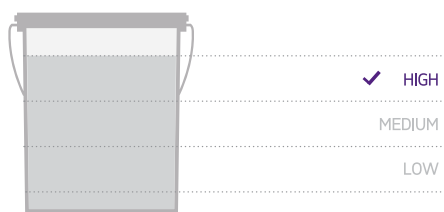

COLOURS AVAILABLE

1700+*



*Currently available in more than 1700 shades as per the Asian Paints Colour Spectra.

COVERAGE

On normal masonry surface by brushing



1 COAT

130- 150 sq.ft/ltr**



2 COATS

65- 75 sq.ft/ltr**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

AVAILABLE PACKS




Shelf life: 3 years from date of manufacture in original tightly closed containers away from sunlight and excessive heat

FINISH



HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints TruCare Exterior Wall Primer Sealer.



FILLING FOR CRACKS For filling cracks upto 3mm use Asian Paints Crack Seal.



FILLING FOR HOLES & DENTS We recommend using polymer modified cement sand mortar for better results. Ultima Protek Shyne should not be applied on surfaces / substrates seepage or dampness.

PAINT APPLICATION PROCESS

APPLICATION	PRODUCT CODE	THINNER	DILUTION % (BY VOLUME)	APPLICATION VISCOSITY (SEC)	RECOATING PERIOD (HOURS)
STEP 1 IN CASE OF FRESH PAINTING SMARTCARE DAMP PROOF/ EXTERIOR PRIMER BRUSH / ROLLER*	8048/ 8065	WATER	SMARTCARE DAMP PROOF: 30% EXTERIOR PRIMER: 1:1	N/A	4 HRS
STEP 2 FOR FRESH AND RE-PAINTING SMARTCARE DAMP PROOF/ EXTERIOR PRIMER BRUSH / ROLLER*	8048/ 8065	WATER	SMARTCARE DAMP PROOF: No Dilution EXTERIOR PRIMER: 1:1	N/A	4 - 6 HRS
STEP 3 TWO COATS ULTIMA PROTEK SHYNE TOP COAT BRUSH / SPRAY / ROLLER*	8091	WATER	BRUSH MAX 40 SPRAY MAX 40 ROLLER MAX 40	BRUSH 20 - 25 SPRAY 20 - 25	4 - 6 HRS

APPLY SMARTCARE DAMP PROOF (SELF PRIMING + 1 UNDILUTED COAT) + THREE COATS OF ULTIMA PROTEK SHYNE AS PER THE RECOMMENDED APPLICATION PROCEDURE ON HORIZONTAL SURFACES LIKE TOP OF WINDOWS ETC

1. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.
2. Some shades may require 3 coats for proper hiding.
*Recommended to be applied with Thread Roller

HOW TO CHOOSE COLOURS

Browse through Asian Paints colour tools to help you find the right colour combination

COLOUR SPECTRA FAN DECK* ULTIMA PROTEK SHYNE WEATHER PROOF EXTERIOR EMULSION SHADE CARD



*These shades are for reference only. Please refer to the Colour Spectra or Colour Palette for correct shade reference

ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

- a. Drying time: Surface dry time 30 min
- b. Sheen levels: Up to 25-30 unit at 60 deg
- c. Stability of thinned paint: To be used within 12 hours

PRECAUTIONS

- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- > Do not over-thin or over-extend the brush.
- > Tint using Asian Paints machine colourants only.
- > Stir well and strain before use.
- > Tinted paints need thorough shaking immediately after tinter addition as well as before use.

SAFETY & ENVIRONMENT RELATED PRECAUTIONS:

- > Kindly refer to the Material Safety Data Sheet (MSDS) for Asian Paints Ultima Protek Shyne which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water for 10-15 minutes and seek medical advice.
- > In case of skin contact and have an allergy, immediately wash skin with soap and plenty of water for 10-15 mins. Get medical attention if irritation develops or persists.
- > Do not breathe vapor or spray. It is recommended to wear a suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- > Left-Over Paint Disposal: Left-over paint/drums should not be disposed-off in soil/drains but can be disposed-off through government authorized disposal area and ensure no impact health & environment.
- > Consumers should consult a local recycling agency for the proper disposal of contaminated pails/drums etc.



For enquiries, feedback and complaints, please call toll-free number 16600124680/9802033515 or write to us at weassure@asianpaints.com.np