

PRODUCT CODE WW03

# Kadisco NC Furniture Lacquer

Kadisco Asian Paints NC Furniture Lacquer has excellent quick drying properties and is suitable for all types of wooden furniture. The lacquer provides an attractive finish, while adding extra strength and durability to the furniture.

## PRODUCT BENEFITS

Fast Drying

Hardness


Durability



SOLVENT BASED

## PRODUCT FEATURES

### WASHABILITY




✓ HIGH

MEDIUM

LOW

### AVAILABLE PACKS

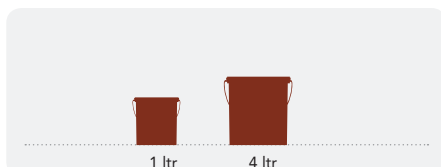


1 ltr

4 ltr

Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.


### COLOURS AVAILABLE

# Clear\*



\*Kadisco NC Furniture Lacquer comes in a clear finish.

### FINISH



✓ SMOOTH

Refer to sheen levels in technical details

### COVERAGE

On normal masonry surface by brushing or spray



## 1 COAT

8 - 9 m<sup>2</sup>/ltr\*\*

## 2 COATS

4 - 5 m<sup>2</sup>/ltr\*\*

\*\*Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

## HOW TO APPLY

### PRE PAINTING STEPS

#### SURFACE PREPARATION

- Surfaces should be clean, dry and free from all defective or poorly adhering material such as dirt, rust and oily materials etc. All surfaces should be thoroughly rubbed down using a suitable sanding paper and then dusted off.
- When applying to previously stained or varnished surfaces, rub down thoroughly along the wood to provide a good surface for subsequent coats.
- When sealing new or bare surfaces use thinned NC sealer.

#### APPLICATION

- Application is done by brush or spray.
- Thinning: For sealing new or bare surfaces add up to 2 part of thinner to 10 parts of varnish. For normal use do not thin more than 25%.
- Clean all tool and equipment immediately after use with thinner.


### PAINT APPLICATION PROCESS

| APPLICATION                     | PRODUCT CODE                                                       | THINNER    | DILUTION % (BY VOLUME) | RECOATING PERIOD <sup>2</sup> (HOURS) |
|---------------------------------|--------------------------------------------------------------------|------------|------------------------|---------------------------------------|
| STEP 1<br>SANDING               | SANDING THE SURFACE WITH SAND PAPER NO 180 AND WIPE TO REMOVE DUST |            |                        |                                       |
| STEP 2<br>APPLICATION OF SEALER | WW03                                                               | NC THINNER | 80-100%                | 4 HOURS                               |
| STEP 3<br>APPLICATION OF LAQUER | WW03                                                               | NC THINNER | 80-100%                | 4 HOURS                               |
| STEP 4<br>APPLICATION OF LAQUER | WW03                                                               | NC THINNER | 80-100%                | 4 HOURS                               |

1. As measured through a Ford cup. 2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions. 3. Some shades may require 3 coats for proper hiding. 4. For sanding new and bare surface add upto 2 parts of thinner to 1 part of Lacquer.

## RECOMMENDED AREAS OF USAGE

### RECOMMENDED USAGE

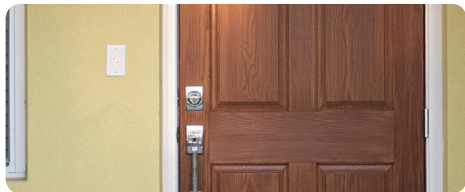

Kadisco Asian Paints 2K PU Lacquer can be used on wood and wooden surfaces.

## ADDITIONAL INFORMATION

### TECHNICAL DETAILS

**a. Drying time:** Touch dry between 45-60 minutes depending on temperature, humidity and type of wood used. In rooms with Parquets, can be used after 48 hours. Maximum hardness after 5 days.

**b. Sheen levels:** 60 - 70 at 60°GH

**d. Stability of thinned paint:** To be used within 24 hours

### PRECAUTIONS

- For optimum performance, Kadisco NC Furniture Lacquer must be applied at a temperature between 10°C and 40°C and humidity not above 75%.
- Do not over-thin and mix according to recommended ratios.
- Stir well and strain before use.

### SAFETY FEATURES

- Kindly refer to the MSDS for Kadisco Asian Paints NC Furniture Lacquer which gives detailed information on safety measures while handling the paint, which is available on request.
- Store the container with the lid tightly closed in an upright position, in a cool, dry place
- Keep out of reach of children and away from eatables.
- May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- Do not pour leftover paint down the drain or in water courses.
- In the event of spills, contain spillage using sand or earth.
- No added Lead, Mercury or Chromium compounds.