

PRODUCT CODE WW03

Kadisco NC Sanding Sealer

Kadisco Asian Paints NC Sanding Sealer has a fast drying rate and is used for priming wood in preparation for a suitable top coat application. It also gives extra strength and durability allowing the top coat to form a strong layer on the surface.

PRODUCT BENEFITS

Excellent Adhesion

Fast Drying


Durability



🔥 SOLVENT BASED

PRODUCT FEATURES

WASHABILITY




✓ HIGH

MEDIUM

LOW


AVAILABLE PACKS

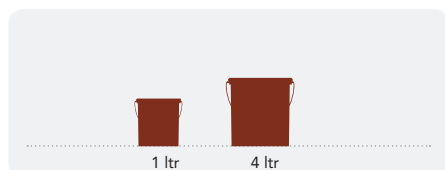

Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.


COLOURS AVAILABLE

Clear*



*Kadisco NC Sanding Sealer comes in a clear finish.

FINISH



✓ SMOOTH

Refer to sheen levels in technical details

COVERAGE

On wood surface by brushing or spraying.



1 COAT
8 - 9 m²/ltr**



2 COATS
4 - 5 m²/ltr**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS

SURFACE PREPARATION

- Surfaces should be clean, dry and free from all defective or poorly adhering material such as dust or oily materials.
- All surfaces should be thoroughly rubbed down using a suitable sanding paper and then dusted off.

APPLICATION

- Application is done by brush, roller or spray gun.
- Thinning: add up to 2 part of thinner to 10 parts of paint.
- Clean all tool and equipment immediately after use with thinner.
- Add 1 part of thinner to 1 part of sealer.


PAINT APPLICATION PROCESS

APPLICATION	PRODUCT CODE	THINNER	DILUTION % (BY VOLUME)	RECOATING PERIOD
STEP 1 SANDING	SANDING THE SURFACE WITH SAND PAPER NO 180 AND WIPE TO REMOVE DUST			
STEP 2 APPLICATION OF SEALER				
STEP 3 APPLICATION OF SEALER	WW03	NC THINNER	80-100%	4 HOURS

1. As measured through a Ford cup. 2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions. 3. Some shades may require 3 coats for proper hiding

RECOMMENDED AREAS OF USAGE

RECOMMENDED USAGE

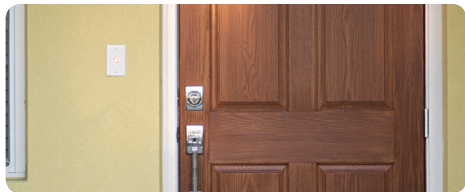

Kadisco Asian Paints 2K PU Lacquer can be used on wood and wooden surfaces.

ADDITIONAL INFORMATION

TECHNICAL DETAILS

- a. Drying time:** Surface dry time 30 minutes
b. Stability of thinned paint: To be used within 24 hours.

PRECAUTIONS

- For optimum performance, Kadisco NC Sanding Sealer must be applied at a temperature between 10°C and 40°C and humidity not above 75%.
- Do not over-thin and mix according to recommended ratios.
- Stir well and strain before use.

SAFETY FEATURES

- Kindly refer to the MSDS for Kadisco Asian Paints NC Sanding Sealer which gives detailed information on safety measures while handling the paint, which is available on request.
- Store the container with the lid tightly closed in an upright position, in a cool, dry place
- Keep out of reach of children and away from eatables.
- May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- Do not pour leftover paint down the drain or in water courses.
- In the event of spills, contain spillage using sand or earth.
- No added Lead, Mercury or Chromium compounds.