PRODUCT CODE 6757

Suprema Advanced Premium Gloss Enamel

Asian Paints Suprema Advanced Premium Gloss Enamel imparts a shiny new look to surfaces painted with this finish. It forms a tough film that is highly resistant to household stains. It thereby serves as a protective armour around the painted surface.

SOLVENT BASED

asianpaints LEAD FREE* GUARANTEE

* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.

PRODUCT BENEFITS

High Gloss Finish
Suprema Advanced Premium Gloss Enamel gives a mirror like gloss for your doors, windows, grills & gates

Tough and Durable
The oil based film of Suprema Advanced Premium Gloss Enamel makes it one of the toughest & most durable paints which forms a protective armor around surfaces

Stain Guard
Suprema Advanced Premium Gloss Enamel is a highly washable paint, thus you can wipe off most common household stains easily

PRODUCT FEATURES

WASHABILITY



✓ BEST IN CLASS
HIGH
MEDIUM
LOW

COLOURS AVAILABLE

Black, White, GoldenYellow, Smoke Gray (G) Phirozi, PO Red, New Olive Green



Currently available in 7 shades

COVERAGE

On smooth masonry surface by brushing

1 COAT
160 - 200 sq. ft./lite**

2 COATS
80 -100 sq. ft./lite**

AVAILABLE PACKS

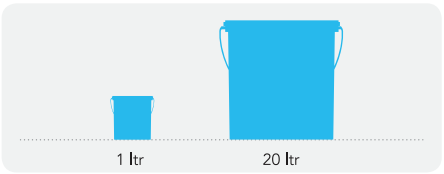

Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

FINISH

MATT | LOW SHEEN | HIGH SHEEN | HIGH GLOSS ↓

✓ SILKY SMOOTH

Refer to sheen levels in technical details

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surfaceroughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It isrecommended to allow 28 days as the curing time for new masonry surfaces.

CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints DampBlock to limit further dampness. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints SmartCare Exterior Sealer.

FILLING FOR CRACKS For filling masonry upto 3mm, use Asian Paints SmartCare Crack Seal.

FILLING FOR HOLES & DENTS
In case of dents and holes, use Asian PaintsTruCare Acrylic Wall Putty or white cement and fine sand in the ratio 1:3.

Suprema Advanced Premium Gloss Enamel should not be applied on surfaces / substrates that are subjected to continuous seepage or dampness.

PAINT APPLICATION PROCESS

APPLICATION	CODE	THINNER	DILUTION %	APPLICATION VISCOSITY[1]	RECOATING PERIOD
STEP 1 SANDING	SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN				
STEP 2 METAL PRIMER (METAL) / WALL PRIMER (MASONRY) / WOOD PRIMER (WOOD)	0005 0359 0007	MTO*	BRUSH 4 - 10 SPRAY 12 - 15	BRUSH 30 - 40 SPRAY 20 - 25	6 - 8 HRS
STEP 3 KNIFING PASTE FILLER (METAL / WOOD) WALL PUTTY (MASONRY) PUTTY KNIFE	0016 1354	MTO WATER	BASED ON REQUIREMENT	BASED ON REQUIREMENT	6 - 8 HRS 4 - 6 HRS
STEP 4 SANDING	SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN				
STEP 5 METAL PRIMER (METAL) / WALL PRIMER (MASONRY) / WOOD PRIMER (WOOD)	0005 0359 0007	MTO*	BRUSH 4 - 10 SPRAY 12 - 15	BRUSH 30 - 40 SPRAY 20 - 25	6 - 8 HRS
STEP 6 SANDING	SAND THE SURFACE WITH SAND PAPER 320 AND WIPE CLEAN				
STEP 7 FIRST COAT SUPREMA ADVANCE PREMIUM GLOSS ENAMEL BRUSH / ROLLER / SPRAY	0023	MTO*	BRUSH 8 - 10 SPRAY 15 - 20	BRUSH 50 - 60 SPRAY 22 - 25	6 - 8 HRS
STEP 8 SECOND COAT SUPREMA ADVANCE PREMIUM GLOSS ENAMEL BRUSH / ROLLER / SPRAY	0023	MTO*	BRUSH 8 - 10 SPRAY 15 - 20	BRUSH 50 - 60 SPRAY 22 - 25	6 - 8 HRS

(1.) As measured through a Food cup. (2.) Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions. (3.) Ensure that the metal substates are free from oil, grease and rust before paint appication. *Mineral Turpentine Oil

ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, atregular intervals of six months.

PRECAUTIONS

- Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hours of application.
- Do not over-thin or over-extend the brush.
- Stir well and strain before use

TECHNICAL DETAILS

a. IS Certification: IS 2932 certified

b. Drying time: Surface dry time 3 hours

c. Gloss levels: 75 - 85 on tin plate at 20° Gloss Head

d. Flash point IS101/1987 Part 1 Sec 6: 35°C (95°F)

e. Stability of thinned paint: To be used within 24 hours

SAFETY FEATURES

- Kindly refer to the MSDS for Asian Paints Suprema Advanced Premium Gloss Enamel which gives detailed information on safety measures while handling the paint, which is available on request.
- Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- Keep out of reach of children and away from eatables.
- May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- Do not breathe vapour or spray. It is ecommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- Do not pour leftover paint down the drrain or in water courses.
- In the event of spills, contain spillage using sand or earth.
- No added Lead, Mercury or Chromium compounds.

Version No. VN13/07/2020